


NRS

SMD Shielded Tiny Power Inductor

Size 4018

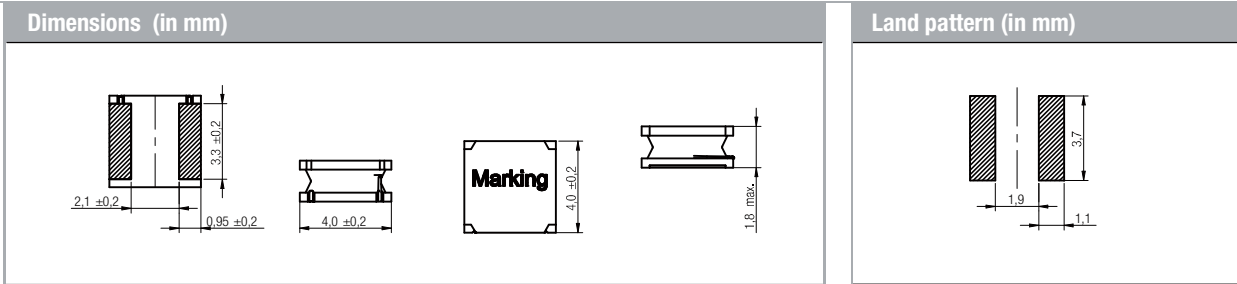

Electrical properties						
Part Number	L (μH)	Tolerance (%)	I _r (A)	I _{sat} (A)	R _{DC} ±25 % (mΩ)	Qty.
NRS4018-1R0N	1.0	±30	2.50	4.5	23	3000
NRS4018-1R5N	1.5		2.34	3.35	33	
NRS4018-2R2M	2.2	±20	2.00	2.70	44	
NRS4018-3R3M	3.3		1.90	2.45	70	
NRS4018-4R7M	4.7		1.70	1.70	90	
NRS4018-5R6M	5.6		1.50	1.60	103	
NRS4018-6R8M	6.8		1.30	1.45	124	
NRS4018-100M	10		1.10	1.30	200	
NRS4018-150M	15		0.92	0.94	268	
NRS4018-220M	22		0.80	0.80	390	
NRS4018-330M	33		0.60	0.65	560	
NRS4018-470M	47		0.50	0.57	756	

2