

## BCMA Series

Common Mode Filters For Automotive Power Line  
Size 1513






### FEATURES

- High common mode impedance cause excellent noise suppression performance.
- AEC-Q200 qualified
- Operating temperature: -40 to +150 °C
- Quantity: 350pcs


### APPLICATIONS

- Measures against common mode noise in power lines for various DC power lines, multimedia devices, and various electronic devices


Dimensions: [mm]



Schematic:



Land Pattern:[mm]










Electrical Properties:


Part No	Impedance @ 100 MHz Min. (Ω)	Impedance @ 100 MHz Typ. (Ω)	DC Resistance Max. (mΩ)	Temperature Rise Current Max. (A)	Rated Volt Max. (V)	IR Min. (MΩ)
BCMA1513-301Y	225	300	5.0	13.0	80	10
BCMA1513-501Y	400	500	6.0	10.0	80	10
BCMA1513-551Y	400	550	6.0	10.0	80	10
BCMA1513-601Y	500	600	7.0	10.0	80	10
BCMA1513-701Y	500	700	7.0	10.0	80	10
BCMA1513-102Y	800	1000	10.0	9.0	80	10
BCMA1513-152Y	1200	1500	23.0	5.0	80	10

Temperature Rise Current: The actual value of DC current when the temperature rise is  $\Delta T=40^{\circ}\text{C}$

## Typical Electrical Characteristics:

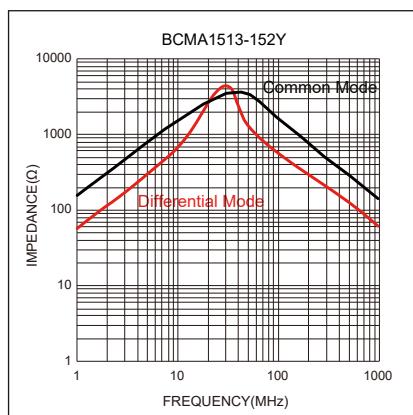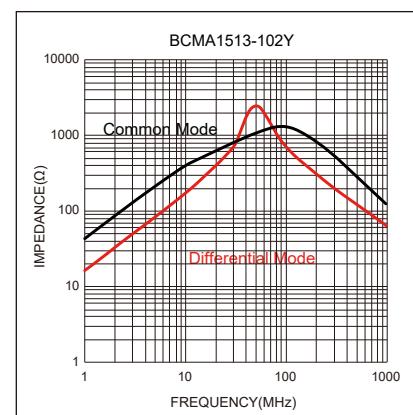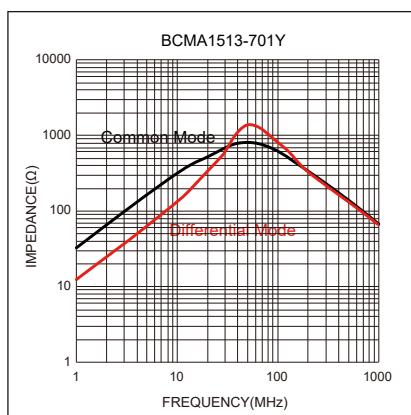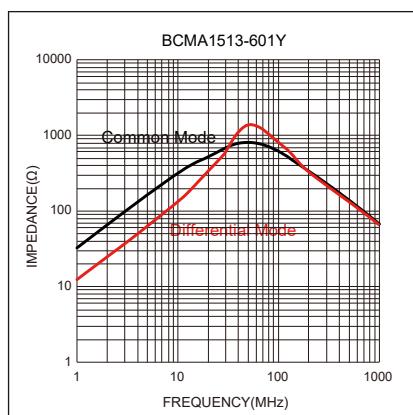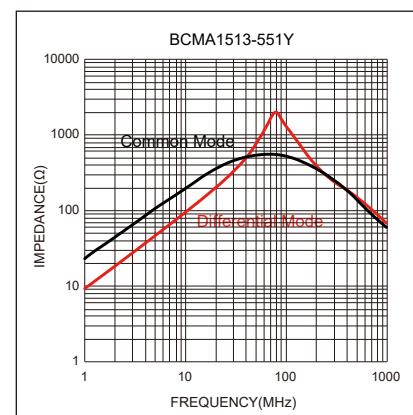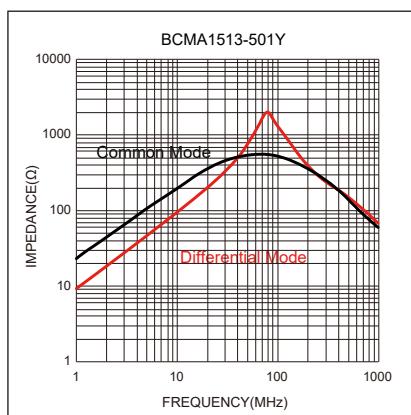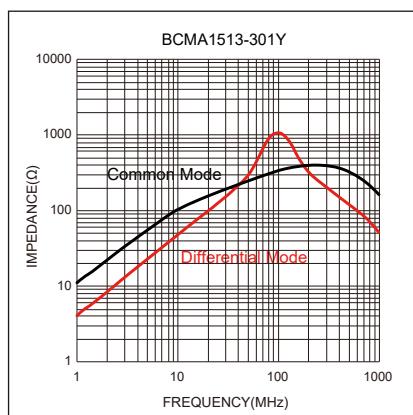


## Soldering Reflow:

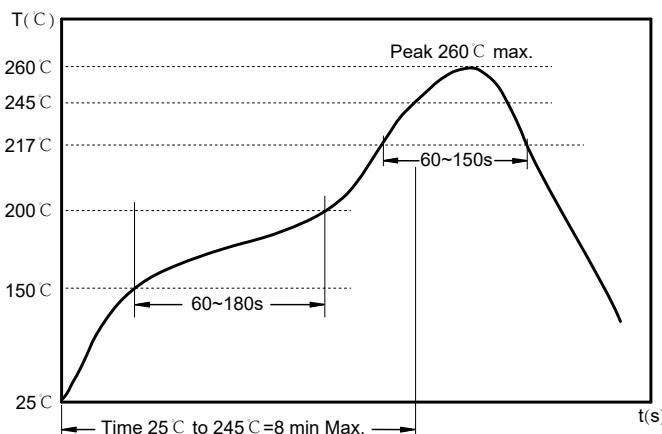

Preheat condition: 150 ~200 °C / 60~180 sec.  
 Allowed time above 217 °C: 60~150 sec.  
 Max temperature: 260 °C.  
 Max time at max temperature: 10 sec.  
 Allowed Reflow time: 3x max.

## Packaging Information:

### Tape Dimension:

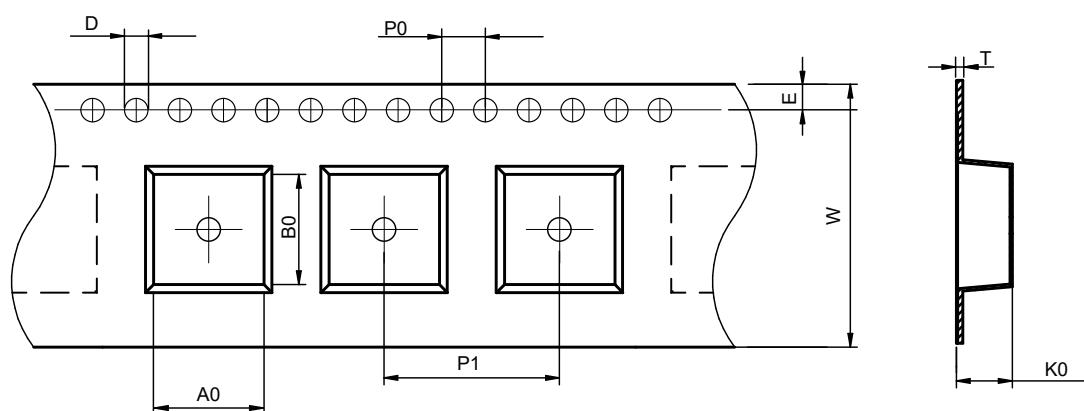


Series	A0 (mm)	B0 (mm)	D (mm)	P0 (mm)	P1 (mm)	W (mm)	K0 (mm)	E (mm)	T (mm)
BCMA1513	14.0±0.1	16.0±0.1	1.5±0.1	4.0±0.1	20.0±0.1	24.0±0.3	6.2±0.1	1.75±0.1	0.40±0.05

### Product Marking:


Marking	Printing (Impedance)

## Peel force of top cover tape:

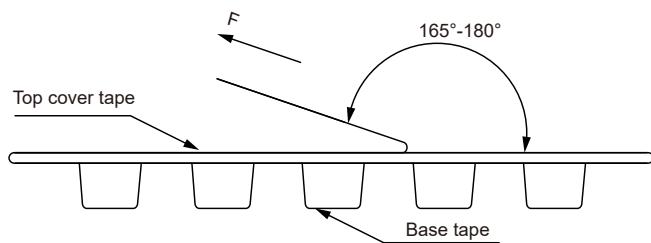


The peel force of top cover tape shall be between 0.10 to 1.17 N

## Reel Dimension: [mm]

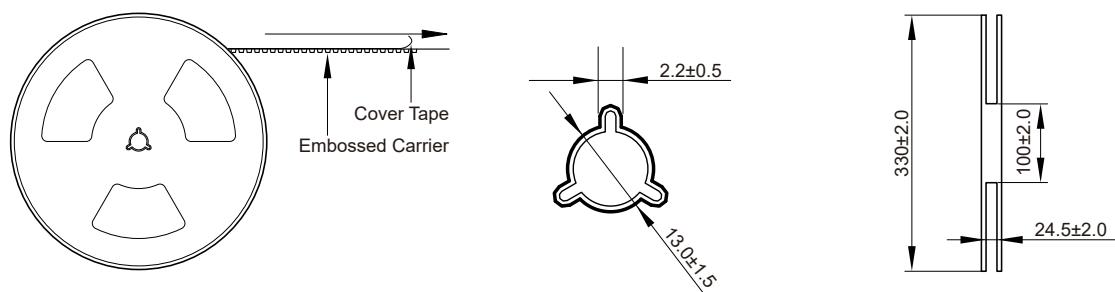

## Packaging Quantity:



350 Pcs/Reel



2 Reel /Inner box( 700 Pcs)



3 Inner box/Carton box(2.1K Pcs)

## Cautions and Warnings:

### Storage Conditions:

- The storage period is within 12 months after the completion of production. Be sure to follow the storage conditions (temperature: -5 to 35°C, humidity: 75% RH Max). If the storage period elapses, the soldering of the terminal electrodes may deteriorate. The warranty period is one year.
- Product should not be exposed to environment with high temperature, high humidity, dust, corrosive gas and etc.
- Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
- Please always handle products carefully to prevent any damage caused by dropping down or inappropriate removing.

### Operation Instructions:

- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Before soldering, be sure to preheat components. The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications. If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- Generally, Koher might not be familiar with either customer's specific application or actual requests as customer does. As a result customer shall be responsible for checking and confirming whether Koher product with the performance described in the product specification is suitable for using in customer's particular application or not.

### Conformal coating:

- The inductance value may change due to the high cure stress of the resin used for coating or molding.
- An open circuit may occur due to mechanical stress from the resin, its amount, cured shape, or operating conditions.
- Please exercise careful attention when selecting a resin for the coating or molding process.
- Prior to using the coating resin, please verify that no reliability issues are observed.
- When applying conformal coating for product protection, materials with a high shrinkage rate should be avoided. If such materials must be used, it is recommended to apply silicone around the inductor core in a closed loop to prevent the conformal coating from flowing into or penetrating the windings, thereby avoiding open-circuit failures caused by the coating's thermal stress.